




LUCD20D

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, shielded

Informacje techniczne

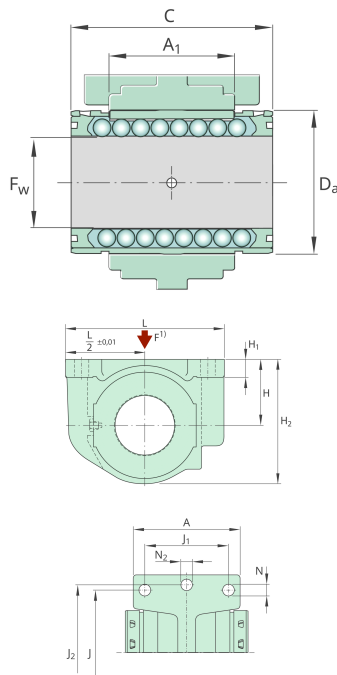

Twoja aktualna wersja produktu

Number of seals 0

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s2 Maximum Acceleration

≈m 156 g Masa

Mounting dimensions

A 1 28 mm Length

H 25 mm Center height

J 1 32 mm

J 45 mm

L 70 mm

J 2 58 mm

A 41 mm Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	4,3 mm	Bore diameter
H ₂	48 mm	Height
D _a	32 mm	Bore diameter
F _W	20 mm	Bore diameter
C	45 mm	Length
C _{max}	2.550 N	Load capacity dyn.
C _{min}	1.730 N	Load capacity dyn.
C _{0 min}	1.120 N	Load capacity stat.
C _{0 max}	1.800 N	Load capacity stat.

Dimensions

H ₁	8 mm	Height of Carriage
----------------	------	--------------------