




LUCD25D

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, shielded

Informacje techniczne

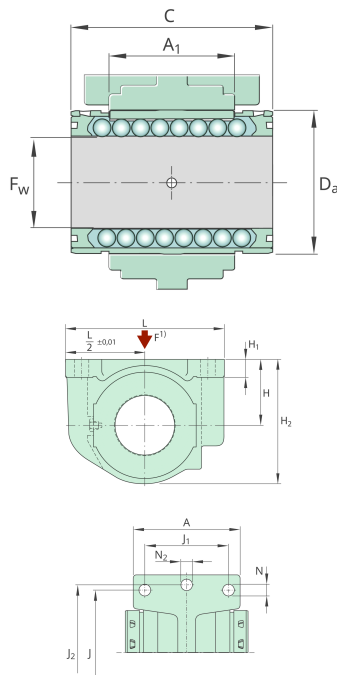

Twoja aktualna wersja produktu

Number of seals 0

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s² Maximum Acceleration

≈m 306 g Masa

Mounting dimensions

A 1 40 mm Length

H 30 mm Center height

J 1 40 mm

J 60 mm

L 80 mm

J 2 68 mm

A 52 mm Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	5,3 mm	Bore diameter
H ₂	58 mm	Height
D _a	40 mm	Bore diameter
F _W	25 mm	Bore diameter
C	58 mm	Length
C _{max}	3.800 N	Load capacity dyn.
C _{min}	2.600 N	Load capacity dyn.
C _{0 min}	1.430 N	Load capacity stat.
C _{0 max}	2.320 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------