


**LUCD30D-2LS**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, seals on both sides

Informacje techniczne

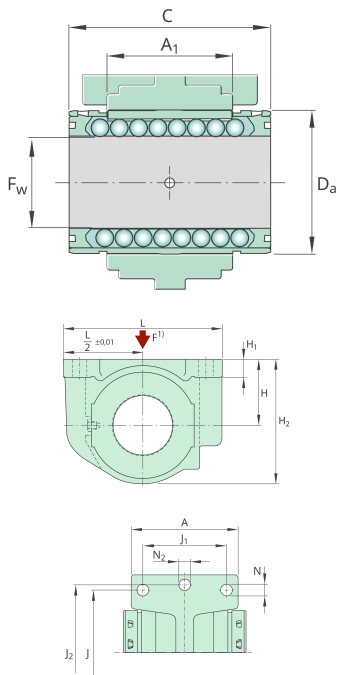

Twoja aktualna wersja produktu

Number of seals 2

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s² Maximum Acceleration

≈m 0,39 kg Masa

Mounting dimensions

A 1 48 mm Length

H 35 mm Center height

J 1 45 mm

J 68 mm

L 88 mm

J 2 76 mm

A 59 mm Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	6,4 mm	Bore diameter
H ₂	67 mm	Height
D _a	47 mm	Bore diameter
F _W	30 mm	Bore diameter
C	68 mm	Length
C _{max}	5.600 N	Load capacity dyn.
C _{min}	3.800 N	Load capacity dyn.
C _{0 min}	2.320 N	Load capacity stat.
C _{0 max}	3.750 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------