




LUCD50

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, shielded

Informacje techniczne

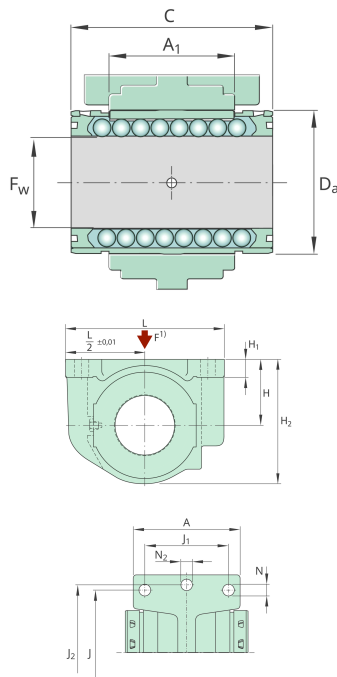

Twoja aktualna wersja produktu

Number of seals 0

Technical data

v max 5 m/s Maximum Speed

a max 100 m/s2 Maximum Acceleration

≈m 1,195 kg Masa

Mounting dimensions

A 1 72 mm Length

H 50 mm Center height

J 1 50 mm

J 108 mm

L 135 mm

J 2 116 mm

A 66 mm Length



Main Dimensions & Performance Data

N ₂	10,5 mm	Bore diameter
N	8,4 mm	Bore diameter
H ₂	99 mm	Height
D _a	75 mm	Bore diameter
F _W	50 mm	Bore diameter
C	100 mm	Length
C _{max}	11.200 N	Load capacity dyn.
C _{min}	8.000 N	Load capacity dyn.
C _{0 min}	4.150 N	Load capacity stat.
C _{0 max}	6.950 N	Load capacity stat.

Dimensions

H ₁	14 mm	Height of Carriage
----------------	-------	--------------------