


LUCE30D-2LS

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, clearance adjustable, seals on both sides

Informacje techniczne

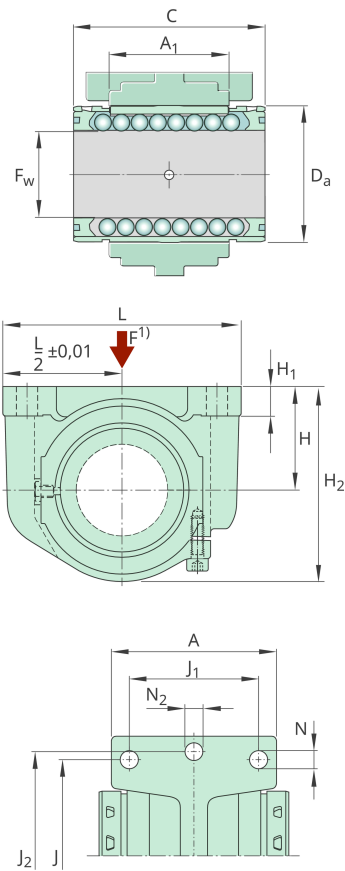

Twoja aktualna wersja produktu

Size	30
Number of seals	2

Technical data

v max	5 m/s	Maximum Speed
a max	100 m/s2	Maximum Acceleration
≈m	450 g	Masa

Mounting dimensions

A 1	68 mm	Length
H	35 mm	Center height
J 1	45 mm	
J	68 mm	
L	88 mm	
J 2	76 mm	
A	59 mm	Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	6,4 mm	Bore diameter
H ₂	67 mm	Height
D _a	47 mm	Bore diameter
F _W	30 mm	Bore diameter
C	68 mm	Length
C _{max}	5.600 N	Load capacity dyn.
C _{min}	3.800 N	Load capacity dyn.
C _{0 min}	2.320 N	Load capacity stat.
C _{0 max}	3.750 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------