


**LUCS30D**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range,
clearance adjustable, shielded

Informacje techniczne

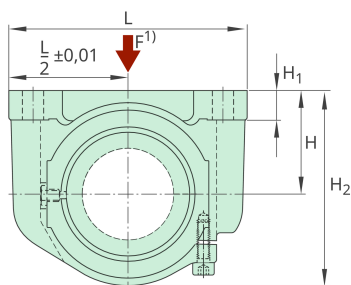

Twoja aktualna wersja produktu

Size	30
Number of seals	0

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
$\approx m$	452 g	Masa

Mounting dimensions

A ₁	48 mm	Length
H	35 mm	Center height
J ₁	45 mm	
J	68 mm	
L	88 mm	
J ₂	76 mm	
A	59 mm	Length



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	6,4 mm	Bore diameter
H ₂	67 mm	Height
D _a	47 mm	Bore diameter
F _W	30 mm	Bore diameter
C	68 mm	Length
C _{max}	7.100 N	Load capacity dyn.
C _{min}	4.800 N	Load capacity dyn.
C _{0 min}	3.550 N	Load capacity stat.
C _{0 max}	5.700 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------