

**LUCT16D-2LS** [↗](#)

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, open design, seals on both sides

Informacje techniczne

Twoja aktualna wersja produktu


Size	16
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	65 g	Masa

Mounting dimensions

A_1	22 mm	Length
H	22 mm	Center height
J_1	26 mm	
J	40 mm	
E	10,4 mm	Width of cutout
L	56 mm	
J_2	46 mm	
A	34,5 mm	Length
α	78 °	Angle

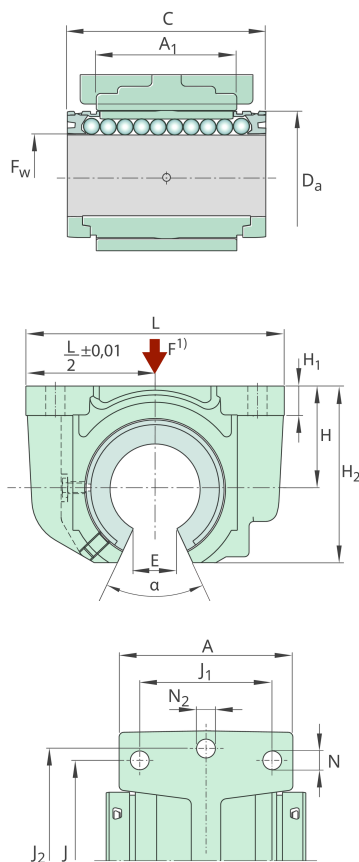



Main Dimensions & Performance Data

N ₂	5,3 mm	Bore diameter
N	4,3 mm	Bore diameter
H ₂	35 mm	Height
D _a	26 mm	Bore diameter
F _W	16 mm	Bore diameter
C	36 mm	Length
C _{max}	1.500 N	Load capacity dyn.
C _{min}	765 N	Load capacity dyn.
C _{0 min}	585 N	Load capacity stat.
C _{0 max}	1.370 N	Load capacity stat.

Dimensions

H ₁	7 mm	Height of Carriage
----------------	------	--------------------