




LUCT20D-2LS

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, open design, seals on both sides

Informacje techniczne

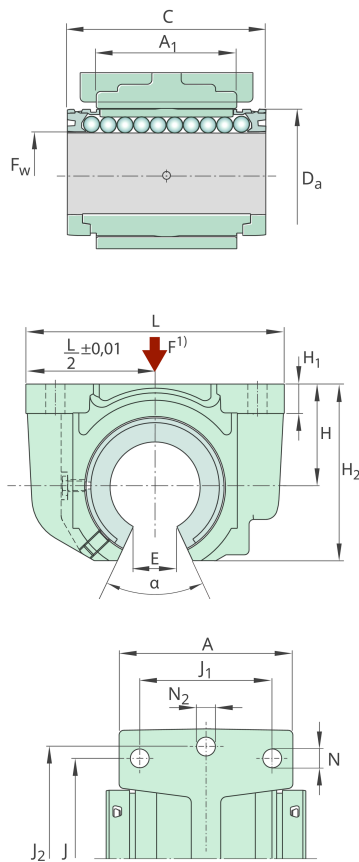

Twoja aktualna wersja produktu

Size	20
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	138 g	Masa

Mounting dimensions

A_1	28 mm	Length
H	25 mm	Center height
J_1	32 mm	
J	45 mm	
E	10,8 mm	Width of cutout
L	70 mm	
J_2	58 mm	
A	41 mm	Length
α	60 °	Angle



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	4,3 mm	Bore diameter
H ₂	42 mm	Height
D _a	32 mm	Bore diameter
F _W	20 mm	Bore diameter
C	45 mm	Length
C _{max}	3.200 N	Load capacity dyn.
C _{min}	1.860 N	Load capacity dyn.
C _{0 min}	1.340 N	Load capacity stat.
C _{0 max}	2.700 N	Load capacity stat.

Dimensions

H ₁	8 mm	Height of Carriage
----------------	------	--------------------