

**LUCT25D-2LS**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, open design, seals on both sides

Informacje techniczne

Twoja aktualna wersja produktu


Size	25
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	269 g	Masa

Mounting dimensions

A_1	40 mm	Length
H	30 mm	Center height
J_1	40 mm	
J	60 mm	
E	13,2 mm	Width of cutout
L	80 mm	
J_2	68 mm	
A	52 mm	Length
α	60 °	Angle

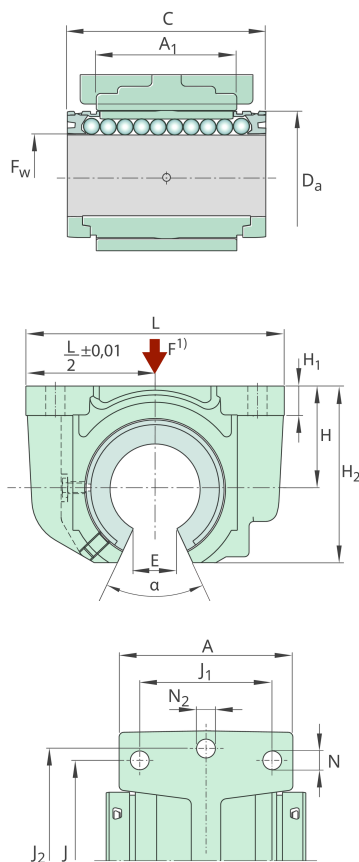



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	5,3 mm	Bore diameter
H ₂	51 mm	Height
D _a	40 mm	Bore diameter
F _W	25 mm	Bore diameter
C	58 mm	Length
C _{max}	4.650 N	Load capacity dyn.
C _{min}	2.700 N	Load capacity dyn.
C _{0 min}	2.000 N	Load capacity stat.
C _{0 max}	4.000 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------