




LUCT30D-2LS

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, open design, seals on both sides

Informacje techniczne

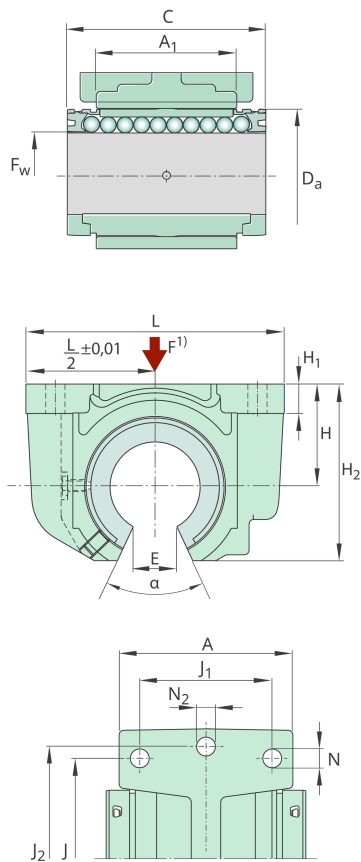

Twoja aktualna wersja produktu

Size	30
Number of seals	2

Technical data

v max	5 m/s	Maximum Speed
a max	100 m/s ²	Maximum Acceleration
m	396 g	Masa

Mounting dimensions

A ₁	48 mm	Length
H	35 mm	Center height
J ₁	45 mm	
J	68 mm	
E	14,2 mm	Width of cutout
L	88 mm	
J ₂	76 mm	
A	59 mm	Length
α	50 °	Angle



Main Dimensions & Performance Data

N ₂	6,4 mm	Bore diameter
N	6,4 mm	Bore diameter
H ₂	60 mm	Height
D _a	47 mm	Bore diameter
F _W	30 mm	Bore diameter
C	68 mm	Length
C _{max}	7.200 N	Load capacity dyn.
C _{min}	4.150 N	Load capacity dyn.
C _{0 min}	3.000 N	Load capacity stat.
C _{0 max}	6.000 N	Load capacity stat.

Dimensions

H ₁	10 mm	Height of Carriage
----------------	-------	--------------------