


**LUND25D**

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, shielded

Informacje techniczne

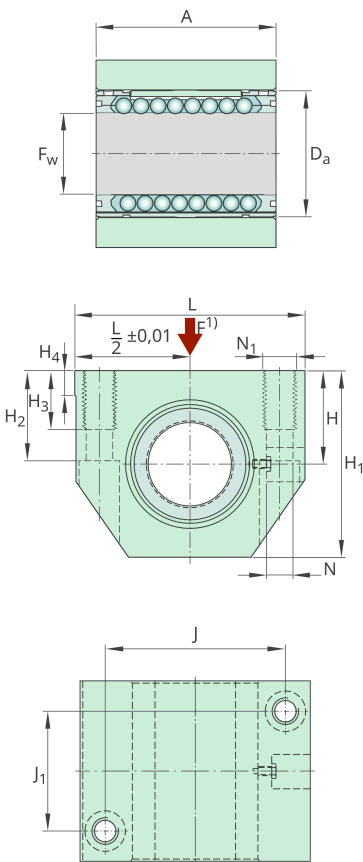

Twoja aktualna wersja produktu

|                 |    |
|-----------------|----|
| Size            | 25 |
| Number of seals | 0  |

Technical data

|       |                      |                      |
|-------|----------------------|----------------------|
| v max | 5 m/s                | Maximum Speed        |
| a max | 100 m/s <sup>2</sup> | Maximum Acceleration |
| m     | 0,552 kg             | Masa                 |

Mounting dimensions

|     |       |               |
|-----|-------|---------------|
| H   | 30 mm | Center height |
| J 1 | 40 mm |               |
| J   | 60 mm |               |
| N 1 | M10   | Thread        |
| L   | 78 mm |               |
| A   | 58 mm | Length        |



Main Dimensions & Performance Data

|         |         |                     |
|---------|---------|---------------------|
| N       | 8,4 mm  | Bore diameter       |
| H 2     | 29 mm   | Height              |
| D a     | 40 mm   | Bore diameter       |
| F W     | 25 mm   | Bore diameter       |
| C max   | 3.800 N | Load capacity dyn.  |
| C min   | 2.600 N | Load capacity dyn.  |
| C 0 min | 1.430 N | Load capacity stat. |
| C 0 max | 2.320 N | Load capacity stat. |

Dimensions

|     |        |                       |
|-----|--------|-----------------------|
| H 1 | 61 mm  | Height of Carriage    |
| H 3 | 22 mm  | Height                |
| H 4 | 8,5 mm | Height of Return Unit |