
**LUNF20D-HV6** [🔗](#)

## Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, open design, shielded, stainless steel

## Informacje techniczne



## Twoja aktualna wersja produktu



|                 |    |
|-----------------|----|
| Size            | 20 |
| Number of seals | 0  |

## Technical data

|           |                      |                      |
|-----------|----------------------|----------------------|
| $v_{max}$ | 5 m/s                | Maximum Speed        |
| $a_{max}$ | 100 m/s <sup>2</sup> | Maximum Acceleration |
| $m$       | 224 g                | Masa                 |

## Mounting dimensions

|          |         |                 |
|----------|---------|-----------------|
| H        | 25 mm   | Center height   |
| $J_1$    | 32 mm   |                 |
| J        | 45 mm   |                 |
| E        | 10,8 mm | Width of cutout |
| $N_1$    | M8      | Thread          |
| L        | 60 mm   |                 |
| A        | 45 mm   | Length          |
| $\alpha$ | 60 °    | Angle           |

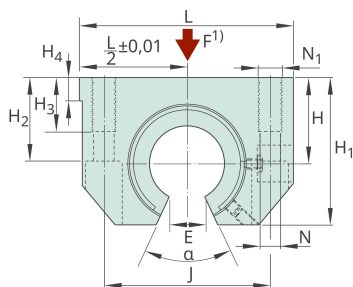



Main Dimensions & Performance Data

|         |         |                     |
|---------|---------|---------------------|
| N       | 6,6 mm  | Bore diameter       |
| H 2     | 24 mm   | Height              |
| D a     | 32 mm   | Bore diameter       |
| F W     | 20 mm   | Bore diameter       |
| C max   | 2.500 N | Load capacity dyn.  |
| C min   | 1.460 N | Load capacity dyn.  |
| C 0 min | 915 N   | Load capacity stat. |
| C 0 max | 1.830 N | Load capacity stat. |

Dimensions

|     |        |        |
|-----|--------|--------|
| H 1 | 42 mm  | Height |
| H 3 | 18 mm  | Height |
| H 4 | 7,5 mm | Height |