

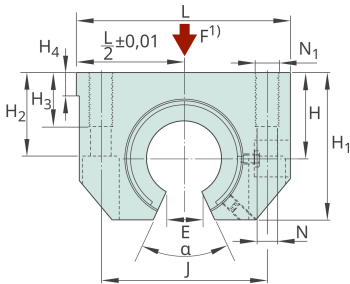


LUNF25D-HV6

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, open design, shielded, stainless steel

Informacje techniczne



Twoja aktualna wersja produktu

Size	25
Number of seals	0

Technical data

v max	5 m/s	Maximum Speed
a max	100 m/s ²	Maximum Acceleration
≈m	460 g	Masa

Mounting dimensions

H	30 mm	Center height
J ₁	40 mm	
J	60 mm	
E	13,2 mm	Width of cutout
N ₁	M10	Thread
L	78 mm	
A	58 mm	Length
α	60 °	Angle



Main Dimensions & Performance Data

N	8,4 mm	Bore diameter
H 2	29 mm	Height
D a	40 mm	Bore diameter
F W	25 mm	Bore diameter
C max	3.900 N	Load capacity dyn.
C min	2.280 N	Load capacity dyn.
C 0 min	1.220 N	Load capacity stat.
C 0 max	2.450 N	Load capacity stat.

Dimensions

H 1	51 mm	Height
H 3	22 mm	Height
H 4	8,5 mm	Height