


LVCR20D

Linear ball bearing and housing unit

Flanged bearing unit, heavy duty range,
shielded

Informacje techniczne

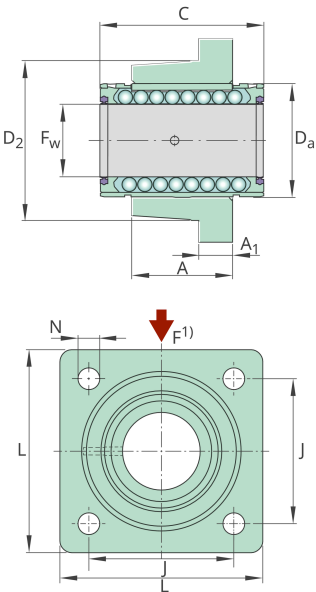

Twoja aktualna wersja produktu

Size	20
Number of seals	0

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	0,326 kg	Masa

Mounting dimensions

A_1	10 mm	Length
J	42 mm	
L	60 mm	
D_2	46 mm	Diameter of centering collar
A	28 mm	Length



Main Dimensions & Performance Data

N	6,6 mm	Bore diameter
D _a	32 mm	Bore diameter
F _W	20 mm	Bore diameter
C	45 mm	Length
C _{max}	3.250 N	Load capacity dyn.
C _{min}	2.200 N	Load capacity dyn.
C _{0 min}	1.630 N	Load capacity stat.
C _{0 max}	2.650 N	Load capacity stat.