


LVCR30D-2LS

Linear ball bearing and housing unit

Flanged bearing unit, heavy duty range, seals on both sides

Informacje techniczne

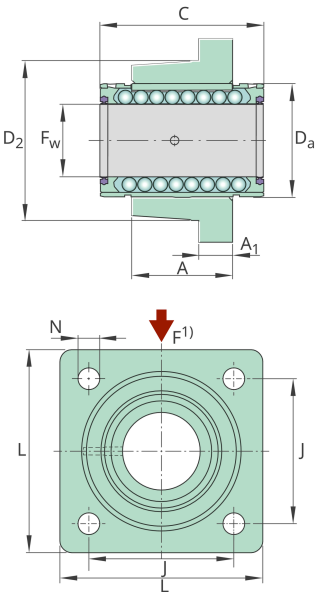

Twoja aktualna wersja produktu

Size	30
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	1,032 kg	Masa

Mounting dimensions

A_1	14 mm	Length
J	60 mm	
L	84 mm	
D_2	66 mm	Diameter of centering collar
A	48 mm	Length



Main Dimensions & Performance Data

N	9 mm	Bore diameter
D _a	47 mm	Bore diameter
F _W	30 mm	Bore diameter
C	68 mm	Length
C _{max}	7.100 N	Load capacity dyn.
C _{min}	4.800 N	Load capacity dyn.
C _{0 min}	3.550 N	Load capacity stat.
C _{0 max}	5.700 N	Load capacity stat.