




MOBI-PULLER-50T-EVA430/S260 [🔗](#)

Mobile hydraulic heavy duty plate puller

BETEX Mobipuller, max. pull-off force 490 kN,
electrically driven hydraulic aggregate, mobile

Informacje techniczne

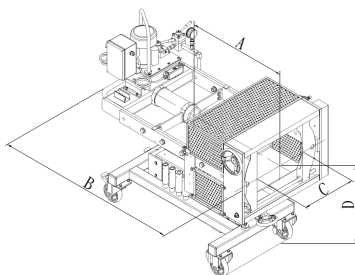

Technical data

U	230 V	Voltage
	AC power	Current type
f	50 – 60 Hz	Power frequency
s _{c max}	260 mm	Max. working stroke cylinder
w _{max}	430 mm	Grip width, max.
F _p	490 kN	Pulling force
A	740 mm	
B	1.560 mm	
C	430 mm	
D	900 – 1430	Working height range [bottom – center axis cylinder] (mm)
	1570 x 990 x 1510	Dimensions [LxWxH] (mm)
	Single acting, electrical	Pump
m	450 kg	Masa



Additional information

Plate puller, height adjustable, with safety cage	Functional principle
2 swivel castors with brake function, 2 fixed castors	Castors
Remote control, 4 adapter pieces (2x Ø 40 mm, 2x Ø 50 mm)	Included in delivery