




NSCS-302

Hydraulic cylinder, 700 bar

BETEX NSCS Compact cylinder, short stroke, single-acting, spring return, 30T class

Informacje techniczne

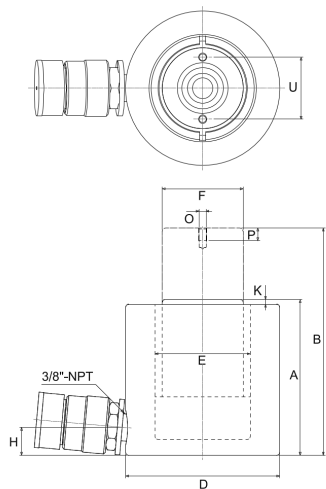

Twoja aktualna wersja produktu

Series	NSCS	Short stroke cylinder
Version	30T	Capacity class 30

Technical data

	30	Capacity class (tons)
s _p	62 mm	Stroke
F _a	309 kN	Advance force, max.
P _{max}	700 bar	Operating pressure, max.
V _{oil}	274 cm³	Oil capacity
A	117 mm	Height, retracted
B	179 mm	Height, extended
D	107 mm	Outer diameter
E	75 mm	Cylinder bore diameter
F	63,5 mm	Plunger diameter
H	19 mm	Base to advance port
K	3 mm	Piston protrusion
O	M5	Plunger female thread
P	8 mm	Plunger thread length
U	39 mm	Piston mounting holes, bolt circle
≈m	6,8 kg	Masa



Additional information

Hard chrome plated and hardened piston, Rolled inside of cylinder, Sandblasted outside with black nitride coating, Coupling with dust cap	Product specifics
---	-------------------