


NX10-Z-XL

Needle roller/axial ball bearing

Needle roller/axial ball bearings NX...-Z,
single direction axial component, for grease
lubrication

X-life

Informacje techniczne

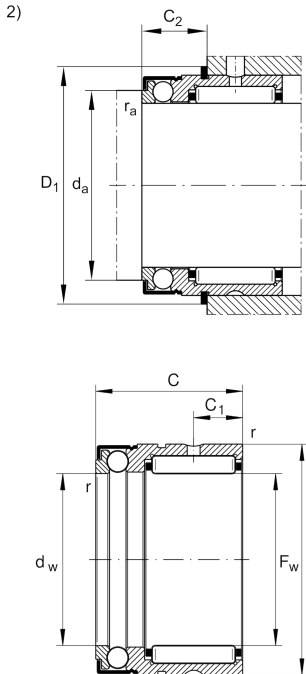

Twoja aktualna wersja produktu

Type of Seal	Z	Bearing with end cap
Cage	Standard	

Main Dimensions & Performance Data

F_w	10 mm	Bore diameter
D	19 mm	Outside diameter
C	18 mm	Height
C_r	5.000 N	Basic dynamic load rating, radial
C_{0r}	3.700 N	Basic static load rating, radial
C_a	4.600 N	Basic dynamic load rating, axial
C_{0a}	7.200 N	Basic static load rating, axial
C_{ur}	730 N	Fatigue load limit, radial
C_{ua}	330 N	Fatigue load limit, axial
n_G	11.000 1/min	Limiting speed
$\approx m$	21,3 g	Masa



Mounting dimensions

d _a	14,6 mm	Mounting dimension shaft shoulder
r _{a max}	0,3 mm	Maximum recess radius
D ₁	21,9 mm	Connection diameter snap ring
C ₂	10 mm	Connection width with snap ring

Dimensions

C ₁	4,7 mm	Distance to lubrication hole
C ₂	4,7 mm	Distance to lubrication hole
d _w	10 mm	Bore diameter of shaft washer
r _{min}	0,3 mm	Minimum chamfer dimension

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

IR6X10X10-IS1-XL	Suitable inner rings IR
WR19, SW19	Snap ring

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Smarowanie smarem
	Uszczelnienie jednostronne