**PASE12-XL** **Plummer block housing unit**

Plummer block housing units PASE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

**X-life****Informacje techniczne****Twoja aktualna wersja produktu**

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

**Main Dimensions & Performance Data**


|                |         |               |
|----------------|---------|---------------|
| d              | 12 mm   | Bore diameter |
| L              | 125 mm  | Length total  |
| H <sub>2</sub> | 57 mm   | Height        |
| ≈m             | 0,45 kg | Masa          |

**Mounting dimensions**

|                |       |                      |
|----------------|-------|----------------------|
| J              | 95 mm | Distance fixing bore |
| N              | 11 mm | Width (slot)         |
| N <sub>1</sub> | 19 mm | Length (slot)        |

**Dimensions**

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 30,2 mm | Distance shaft axis                   |
| A              | 30 mm   | Width (base)                          |
| A <sub>1</sub> | 18 mm   | Width (head)                          |
| H <sub>1</sub> | 10 mm   | Height (base)                         |
| B <sub>1</sub> | 28,6 mm | Locking collar total width            |
| S <sub>1</sub> | 22,1 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

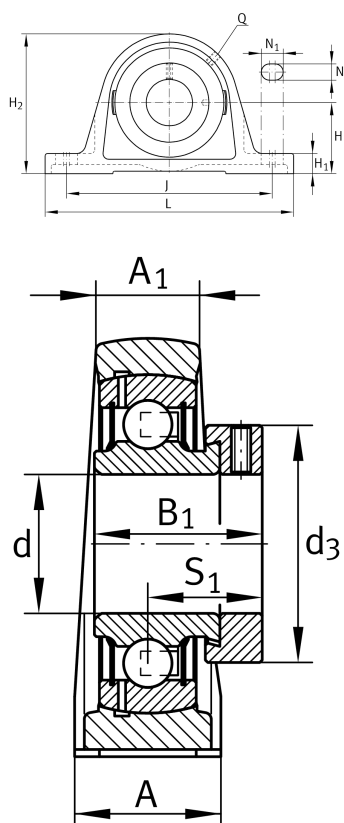



Additional information

|                 |                     |
|-----------------|---------------------|
| ASE03           | Housing             |
| GRAE12-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |