


PASE20-N-FA106

Plummer block housing unit

Plummer block housing unit PASE...-N, RIBB
cast iron ASE SAO AK

Informacje techniczne

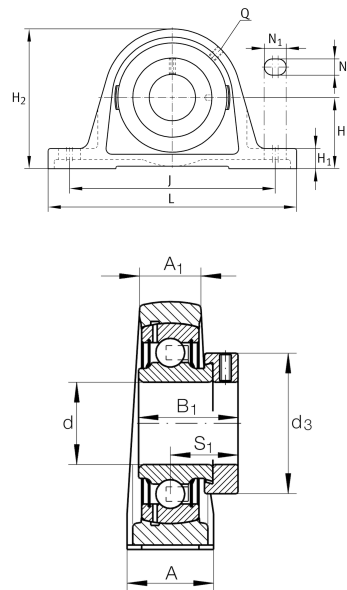

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Groove	N	Cast iron housing with undercut slot for end caps
Manufacturing instruction	FA106	Bearing subjected to special noise testing
Material	GG	Cast iron

Main Dimensions & Performance Data

d	20 mm	Bore diameter
L	130 mm	Length total
H 2	64 mm	Height
≈m	0,58 kg	Masa

Mounting dimensions

J	97 mm	Distance fixing bore
N	11 mm	Width (slot)
N 1	19 mm	Length (slot)

Dimensions

H	33,3 mm	Distance shaft axis
A	32 mm	Width (base)
A 1	19 mm	Width (head)
H 1	14,5 mm	Height (base)
Q	M6	Connection thread for lubrication



Additional information

ASE04-E	Housing
GRAE20-NPP-B	Bearing designation
KASK04	Protecting cap

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.