**PASE45-XL-FA125** [↗](#)

## Plummer block housing unit

Plummer block housing units PASE...-FA125, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals, with anti-corrosion protection

**X-life**

## Informacje techniczne

## Twoja aktualna wersja produktu



|                           |       |                                                  |
|---------------------------|-------|--------------------------------------------------|
| Material                  | GG    | Grey cast iron                                   |
| Manufacturing instruction | FA125 | Unit with Corrotect coating, corrosion-resistant |

## Main Dimensions &amp; Performance Data

|                |         |               |
|----------------|---------|---------------|
| d              | 45 mm   | Bore diameter |
| L              | 192 mm  | Length total  |
| H <sub>2</sub> | 107 mm  | Height        |
| ≈m             | 2,12 kg | Masa          |

## Mounting dimensions

|                |           |                      |
|----------------|-----------|----------------------|
| J              | 149,65 mm | Distance fixing bore |
| N              | 14 mm     | Width (slot)         |
| N <sub>1</sub> | 29 mm     | Length (slot)        |

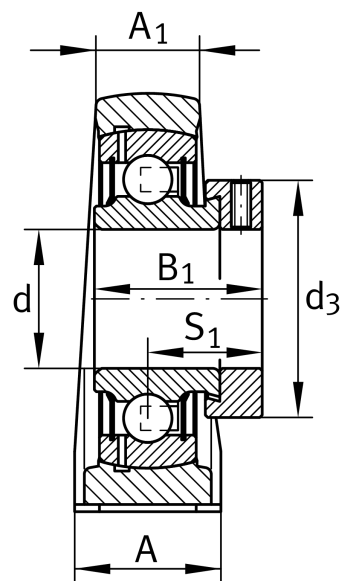



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 54 mm   | Distance shaft axis                   |
| A              | 48 mm   | Width (base)                          |
| A <sub>1</sub> | 32 mm   | Width (head)                          |
| H <sub>1</sub> | 21,5 mm | Height (base)                         |
| B <sub>1</sub> | 43,8 mm | Locking collar total width            |
| S <sub>1</sub> | 32,8 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

Additional information

|                       |                     |
|-----------------------|---------------------|
| ASE09                 | Housing             |
| GRAE45-XL-NPP-B-FA125 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |