



PBS15-XL

Plummer block housing unit

Plummer block housing units PBS, sheet steel housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

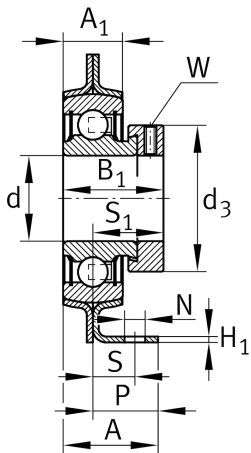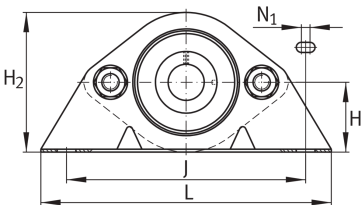

Twoja aktualna wersja produktu

Material Steel sheet

Main Dimensions & Performance Data

|        |          |                                  |
|--------|----------|----------------------------------|
| d      | 15 mm    | Bore diameter                    |
| H 2    | 59,6 mm  | Height                           |
| L      | 123,8 mm | Length total                     |
| C 0r G | 2.700 N  | Load carrying capacity (housing) |
| ≈m     | 0,32 kg  | Masa                             |

Mounting dimensions

|     |         |                      |
|-----|---------|----------------------|
| J   | 92 mm   | Distance fixing bore |
| N   | 10,5 mm | Width (slot)         |
| N 1 | 5,6 mm  | Distance slot center |
| S   | 15 mm   | Distance fixing      |

Dimensions

|     |         |                     |
|-----|---------|---------------------|
| H   | 30,2 mm | Distance shaft axis |
| A   | 32,5 mm | Width (base)        |
| A 1 | 14,2 mm | Width (head)        |
| H 1 | 2,6 mm  | Height (base)       |
| P   | 25,4 mm | Distance support    |



Additional information

|                |                     |
|----------------|---------------------|
| GEH40-PBS      | Housing             |
| RAE15-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |