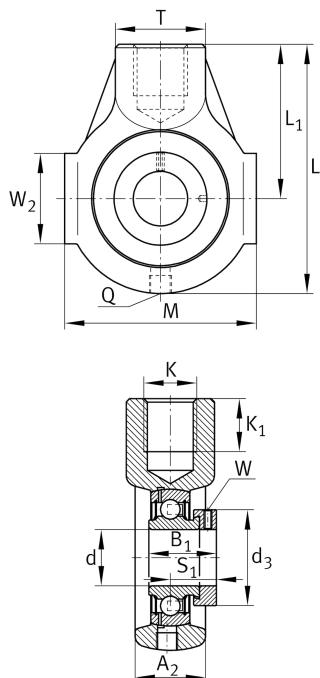


**PHE25-XL** **Take-up housing unit**

Take-up housing units PHE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

**X-life****Informacje techniczne****Twoja aktualna wersja produktu**

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

**Main Dimensions & Performance Data**

|                |        |                     |
|----------------|--------|---------------------|
| d              | 25 mm  | Bore diameter       |
| L              | 99 mm  | Length total        |
| M              | 70 mm  | Housing total width |
| A <sub>2</sub> | 28 mm  | Width housing       |
| m              | 0,7 kg | Masa                |

**Mounting dimensions**

|                |       |                    |
|----------------|-------|--------------------|
| K              | M20   | Thread fixing bore |
| K <sub>1</sub> | 22 mm | Thread depth       |

**Dimensions**

|                |       |                                   |
|----------------|-------|-----------------------------------|
| L <sub>1</sub> | 64 mm | Distance shaft axis               |
| T              | 35 mm | Height housing fixing side        |
| W <sub>2</sub> | 38 mm | Length of guidance face           |
| Q              | M6    | Connection thread for lubrication |



Additional information

|                 |                     |
|-----------------|---------------------|
| HE05            | Housing             |
| GRAE25-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |