




PHEY45-XL

Take-up housing unit

Take-up housing units PHEY, cast iron housing, radial insert ball bearing with grub screws in inner ring, P seals

X-life

Informacje techniczne

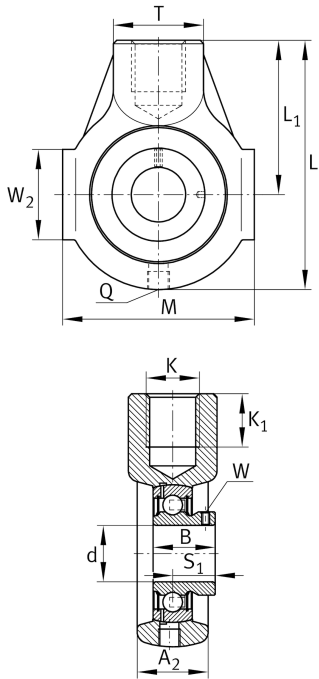

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|                |        |                     |
|----------------|--------|---------------------|
| d              | 45 mm  | Bore diameter       |
| L              | 145 mm | Length total        |
| M              | 110 mm | Housing total width |
| A <sub>2</sub> | 40 mm  | Width housing       |
| m              | 1,9 kg | Masa                |

Mounting dimensions

|                |       |                    |
|----------------|-------|--------------------|
| K              | M24   | Thread fixing bore |
| K <sub>1</sub> | 24 mm | Thread depth       |

Dimensions

|                |       |                                   |
|----------------|-------|-----------------------------------|
| L <sub>1</sub> | 90 mm | Distance shaft axis               |
| T              | 40 mm | Height housing fixing side        |
| W <sub>2</sub> | 45 mm | Length of guidance face           |
| Q              | M6    | Connection thread for lubrication |



Additional information

|                |                     |
|----------------|---------------------|
| HE09           | Housing             |
| GAY45-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |