




**PSHE25-TV-FA125.5**

Plummer block housing unit

Plummer block housing unit PSHE...-TV, RIBB plastic

Informacje techniczne

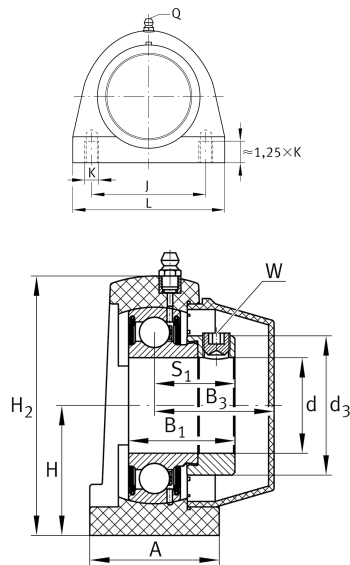

Twoja aktualna wersja produktu

|                           |         |                                |
|---------------------------|---------|--------------------------------|
| Special material          | TV      | Plastic housing                |
| Material                  | TV      | Plastic                        |
| Manufacturing instruction | FA125.5 | Bearing with Corrotect coating |

Main Dimensions & Performance Data

|     |         |               |
|-----|---------|---------------|
| d   | 25 mm   | Bore diameter |
| L   | 76,2 mm | Length        |
| H 2 | 73,5 mm | Height        |
| ≈m  | 0,35 kg | Masa          |

Mounting dimensions

|   |         |                      |
|---|---------|----------------------|
| J | 50,8 mm | Distance fixing bore |
|---|---------|----------------------|

Dimensions

|     |              |                                   |
|-----|--------------|-----------------------------------|
| H   | 36,5 mm      | Distance shaft axis               |
| A   | 39,5 mm      | Width (base)                      |
| B 1 | 31 mm        | Locking collar total width        |
| S   | 23,5 mm      | Distance raceway                  |
| Q   | 1/4 - 28 UNF | Connection thread for lubrication |



Additional information

|                          |                     |
|--------------------------|---------------------|
| GEH-SHE05-TV             | Housing             |
| GRAE25-NPP-B-FA107/125.5 | Bearing designation |
| KASK05-S-G               | End cap             |
| KASK05-S-R-NBR           | Open protecting cap |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -35 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |