




PTUE30-XL

Take-up housing unit

Take-up housing units PTUE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

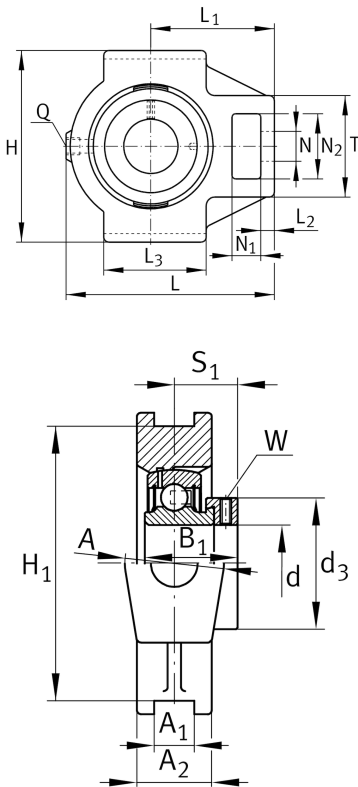

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	30 mm	Bore diameter
---	-------	---------------

H	102 mm	Height
---	--------	--------

L	114,5 mm	Length total
---	----------	--------------

B 1	35,8 mm	Locking collar total width
-----	---------	----------------------------

m	1,19 kg	Masa
---	---------	------

Mounting dimensions

A 1	12 mm	Width guidance groove
-----	-------	-----------------------

H13		Width guidance groove clearance
-----	--	---------------------------------

H 1	89 mm	Distance guidance grooves
-----	-------	---------------------------

0,15 mm		Upper distance guidance groove tolerance
---------	--	--

-0,15 mm		Lower distance guidance groove tolerance
----------	--	--

N	22 mm	Fixing bore
---	-------	-------------



Dimensions

L ₁	70 mm	Distance shaft axis
L ₂	10 mm	Length fixed link
L ₃	57 mm	Length guidance groove
A	37 mm	Width housing fixing side
N ₁	18 mm	Width recess
N ₂	36,5 mm	Height recess
S ₁	26,8 mm	Distance of raceway to locking collar
T	56 mm	Height housing fixing side
Q	M6	Connection thread for lubrication
A ₂	25 mm	Width housing

Additional information

TUE06	Housing
GRAE30-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.