




PTUE35-XL

Take-up housing unit

Take-up housing units PTUE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

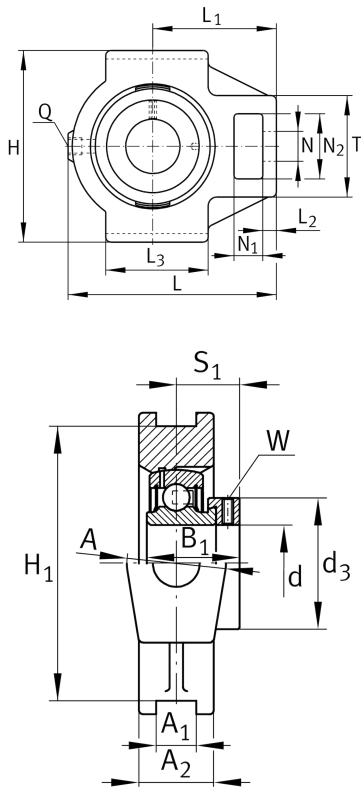

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|   |       |               |
|---|-------|---------------|
| d | 35 mm | Bore diameter |
|---|-------|---------------|

|   |        |        |
|---|--------|--------|
| H | 102 mm | Height |
|---|--------|--------|

|   |          |              |
|---|----------|--------------|
| L | 131,5 mm | Length total |
|---|----------|--------------|

|     |       |                            |
|-----|-------|----------------------------|
| B 1 | 39 mm | Locking collar total width |
|-----|-------|----------------------------|

|   |         |      |
|---|---------|------|
| m | 1,65 kg | Masa |
|---|---------|------|

Mounting dimensions

|     |       |                       |
|-----|-------|-----------------------|
| A 1 | 12 mm | Width guidance groove |
|-----|-------|-----------------------|

|     |  |                                 |
|-----|--|---------------------------------|
| H13 |  | Width guidance groove clearance |
|-----|--|---------------------------------|

|     |       |                           |
|-----|-------|---------------------------|
| H 1 | 89 mm | Distance guidance grooves |
|-----|-------|---------------------------|

|         |  |                                          |
|---------|--|------------------------------------------|
| 0,15 mm |  | Upper distance guidance groove tolerance |
|---------|--|------------------------------------------|

|          |  |                                          |
|----------|--|------------------------------------------|
| -0,15 mm |  | Lower distance guidance groove tolerance |
|----------|--|------------------------------------------|

|   |       |             |
|---|-------|-------------|
| N | 22 mm | Fixing bore |
|---|-------|-------------|



### Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| L <sub>1</sub> | 80 mm   | Distance shaft axis                   |
| L <sub>2</sub> | 13 mm   | Length fixed link                     |
| L <sub>3</sub> | 63 mm   | Length guidance groove                |
| A              | 40 mm   | Width housing fixing side             |
| N <sub>1</sub> | 18 mm   | Width recess                          |
| N <sub>2</sub> | 36,5 mm | Height recess                         |
| S <sub>1</sub> | 29,5 mm | Distance of raceway to locking collar |
| T              | 64 mm   | Height housing fixing side            |
| Q              | M6      | Connection thread for lubrication     |
| A <sub>2</sub> | 30 mm   | Width housing                         |

### Additional information

|                 |                     |
|-----------------|---------------------|
| TUE07           | Housing             |
| GRAE35-XL-NPP-B | Bearing designation |

### Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |