**RASE40-TV-VA-FD**

Plummer block housing unit

Plummer block housing units, FD design

Informacje techniczne

Twoja aktualna wersja produktu



Special material	TV	Plastic housing
Corrosion resistant bearing	VA	Corrosion-resistant VA design
Material	TV-FD	Plastic for food industry

Main Dimensions & Performance Data

d	40 mm	Bore diameter
L	184 mm	Length
H 2	98 mm	Height
≈m	0,99 kg	Masa

Mounting dimensions

J	137 mm	Distance fixing bore
N	14 mm	Width (slot)
N 1	18 mm	Length (slot)
W	4 mm	Width of flats

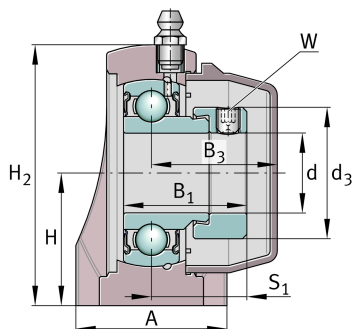



Dimensions

H	49,2 mm	Distance shaft axis
A	54 mm	Width (base)
H ₁	19,5 mm	Height (base)
B ₁	43,7 mm	Locking collar total width
B ₃	51,5 mm	Distance housing centre to cap end
S ₁	34,7 mm	Distance raceway to locking collar
Q	1/4"-28 UNF	Connection thread for lubrication
d ₃	60,3 mm	Outside diameter eccentric locking collar

Additional information

GEH.ASE08-TV-WHT	Housing
GE40-KRR-B-FA107-VA-FD	Bearing designation
KASK08-S-G-WHT	End cap
KASK08-S-R-NBR-WHT	Open protecting cap

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.