


RASE60-XL-FA164

Plummer block housing unit

Plummer block housing unit RASE...-XL-FA164, RIBB cast iron ASE SAO AK

X-life

Informacje techniczne

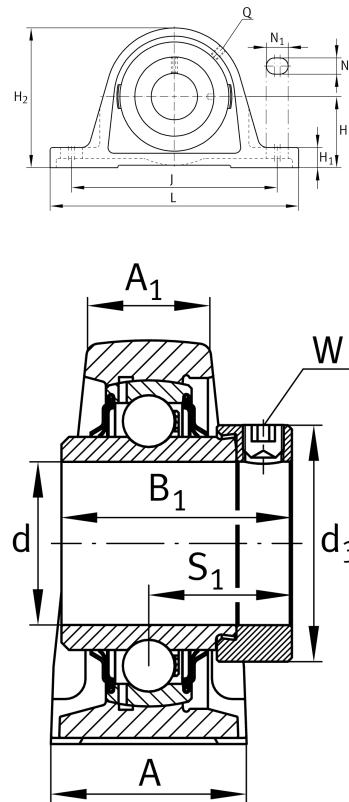

Twoja aktualna wersja produktu

|                           |       |                                      |
|---------------------------|-------|--------------------------------------|
| Material                  | GG    | Grey cast iron                       |
| Manufacturing instruction | FA164 | High temperature design up to +250°C |

Main Dimensions & Performance Data

|     |        |               |
|-----|--------|---------------|
| d   | 60 mm  | Bore diameter |
| L   | 240 mm | Length total  |
| H 2 | 140 mm | Height        |
| ≈m  | 4,8 kg | Masa          |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 190 mm | Distance fixing bore |
| N   | 18 mm  | Width (slot)         |
| N 1 | 28 mm  | Length (slot)        |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 69,9 mm | Distance shaft axis                   |
| A              | 60 mm   | Width (base)                          |
| A <sub>1</sub> | 42 mm   | Width (head)                          |
| H <sub>1</sub> | 25 mm   | Height (base)                         |
| B <sub>1</sub> | 77,9 mm | Locking collar total width            |
| S <sub>1</sub> | 46,8 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

Additional information

|                     |                     |
|---------------------|---------------------|
| ASE12-FA125         | Housing             |
| GE60-XL-KRR-B-FA164 | Bearing designation |
| KASK12-J            | Protecting cap      |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | 150 °C | Operating temperature min. |
| T <sub>max</sub> | 250 °C | Operating temperature max. |