**RASE75-XL**

## Plummer block housing unit

Plummer block housing units RASE, cast iron housing, radial insert ball bearing with eccentric locking collar, R seals

**X-life**

## Informacje techniczne

## Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

## Main Dimensions &amp; Performance Data



|                |          |               |
|----------------|----------|---------------|
| d              | 75 mm    | Bore diameter |
| L              | 265 mm   | Length total  |
| H <sub>2</sub> | 164 mm   | Height        |
| ≈m             | 6,626 kg | Masa          |

## Mounting dimensions

|                |        |                      |
|----------------|--------|----------------------|
| J              | 210 mm | Distance fixing bore |
| N              | 22 mm  | Width (slot)         |
| N <sub>1</sub> | 30 mm  | Length (slot)        |

## Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 82,5 mm | Distance shaft axis                   |
| A              | 66 mm   | Width (base)                          |
| A <sub>1</sub> | 48 mm   | Width (head)                          |
| H <sub>1</sub> | 27,5 mm | Height (base)                         |
| B <sub>1</sub> | 67 mm   | Locking collar total width            |
| S <sub>1</sub> | 45,6 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

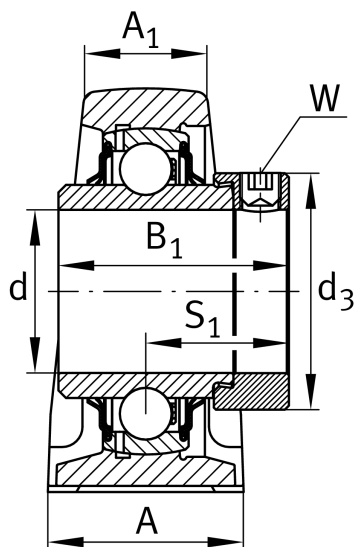



Additional information

|               |                     |
|---------------|---------------------|
| ASE15         | Housing             |
| GE75-XL-KRR-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |