


**RSHE55-XL**

Plummer block housing unit

Plummer block housing units RSHE, cast iron housing, radial insert ball bearing with eccentric locking collar, R seals

X-life

Informacje techniczne

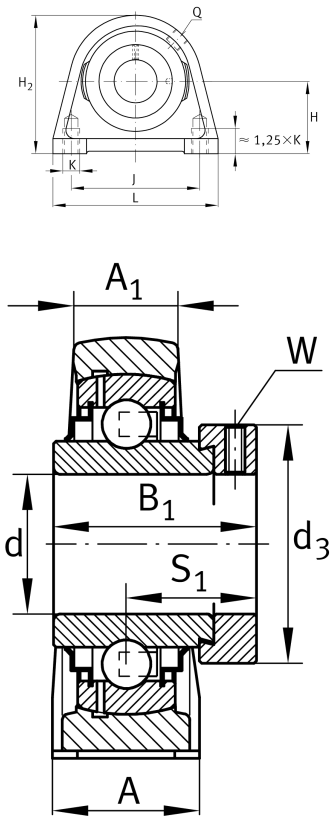

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|                |         |               |
|----------------|---------|---------------|
| d              | 55 mm   | Bore diameter |
| L              | 150 mm  | Length total  |
| H <sub>2</sub> | 125 mm  | Height        |
| ≈m             | 3,79 kg | Masa          |

Mounting dimensions

|   |        |                      |
|---|--------|----------------------|
| J | 118 mm | Distance fixing bore |
| K | M16    | Thread fixing bore   |

Dimensions

|                |       |                                   |
|----------------|-------|-----------------------------------|
| H              | 64 mm | Distance shaft axis               |
| A              | 60 mm | Width (base)                      |
| A <sub>1</sub> | 35 mm | Width (head)                      |
| Q              | M6    | Connection thread for lubrication |

Additional information

|               |                     |
|---------------|---------------------|
| SHE11         | Housing             |
| GE55-XL-KRR-B | Bearing designation |



Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |