





RTUEY35-XL

Take-up housing unit

Take-up housing units RTUEY, cast iron housing, radial insert ball bearing with grub screws in inner ring, R seals

X-life

Informacje techniczne

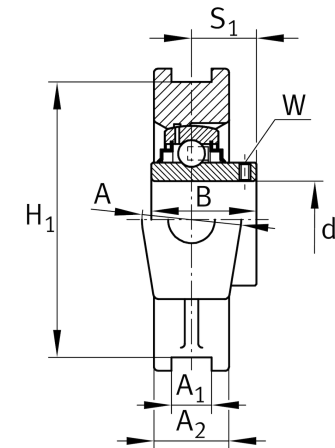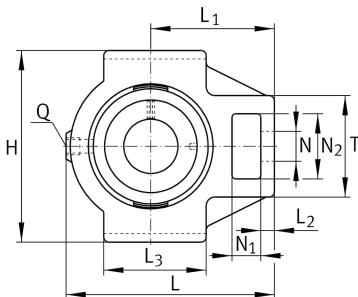

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|    |          |               |
|----|----------|---------------|
| d  | 35 mm    | Bore diameter |
| H  | 102 mm   | Height        |
| L  | 131,5 mm | Length total  |
| ≈m | 1,63 kg  | Masa          |

Mounting dimensions

|     |          |                                          |
|-----|----------|------------------------------------------|
| A 1 | 12 mm    | Width guidance groove                    |
|     | H13      | Width guidance groove clearance          |
| H 1 | 89 mm    | Distance guidance grooves                |
|     | 0,15 mm  | Upper distance guidance groove tolerance |
|     | -0,15 mm | Lower distance guidance groove tolerance |
| N   | 22 mm    | Fixing bore                              |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| L <sub>1</sub> | 80 mm   | Distance shaft axis                   |
| L <sub>2</sub> | 13 mm   | Length fixed link                     |
| L <sub>3</sub> | 63 mm   | Length guidance groove                |
| A              | 40 mm   | Width housing fixing side             |
| N <sub>1</sub> | 18 mm   | Width recess                          |
| N <sub>2</sub> | 36,5 mm | Height recess                         |
| B              | 42,9 mm | Width inner ring                      |
| S <sub>1</sub> | 25,4 mm | Distance of raceway to locking collar |
| T              | 64 mm   | Height housing fixing side            |
| Q              | M6      | Connection thread for lubrication     |
| A <sub>2</sub> | 30 mm   | Width housing                         |

Additional information

|                |                     |
|----------------|---------------------|
| TUE07          | Housing             |
| GYE35-XL-KRR-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |