



RUKS35-D-A-SR

Braking/clamping element

Clamping element RUKS...D-A-SR, for linear recirculating roller bearing and guideway assembly, oil connector on side

Informacje techniczne




Twoja aktualna wersja produktu

Size	35	
Version	D	
Internal design	A	
Oil feed	SR	Oil connector on side

Main Dimensions & Performance Data

H	48 mm	Height sytem
B	98 mm	Width clamping element
L	134,3 mm	Length of clamping element
≈m	2,44 kg	Masa

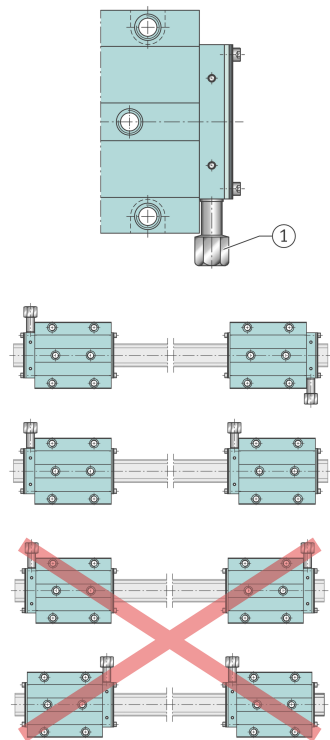

Mounting dimensions

J _B	82 mm	Hole pattern width
A ₃	24,5 mm	Mounting dimension oil connector
L ₁	113 mm	Length saddle plate
J _{L1}	62 mm	Hole pattern lengthwise
J _{L2}	52 mm	Hole pattern centre
J _{L5}	32 mm	Distance
N _{2 max}	6 mm	Max diameter lubrication hole adjacent constr
H ₁	6,8 mm	Space (system)
H ₃	21 mm	
T ₇	12 mm	Depth thread
H ₉	13,4 mm	
G ₂	M10	Size thread above for DIN ISO 4762-12.9
M G ₂	41 Nm	Tightening torque above
K ₃	M8	Size thread below for DIN ISO 4762-12.9
M K ₃	41 Nm	Tightening torque below
D ₂	8,6 mm	Through-bore

Related products

TSX35-E; TSX35-F	Suitable guideway
RUE35-E; RUE35-F	Suitable system