




FAG

SES519-616-L

Plummer block housing

Split plummer block housing for various bearing designs.

Informacje techniczne

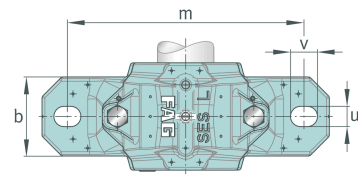


Twoja aktualna wersja produktu

Material	L	Flake graphite cast iron
----------	---	--------------------------

Main Dimensions & Performance Data

a	345 mm	Length base
h 1	212 mm	Height
g	145 mm	Width housing body
≈m	13,8 kg	Masa

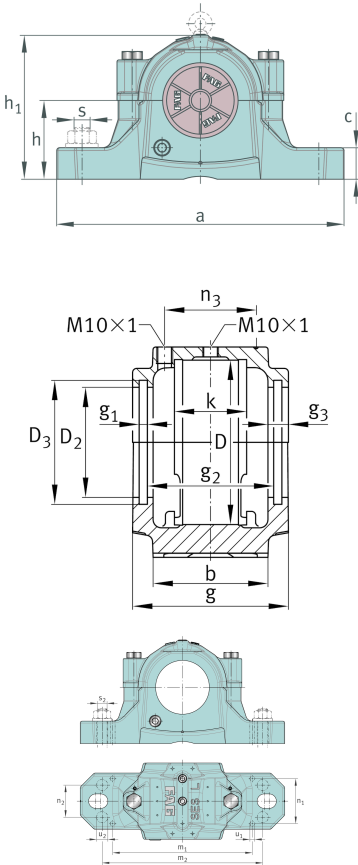

Mounting dimensions

D	170 mm	Outside diameter bearing
k	68 mm	Width bearing seat
h	112 mm	Base to shaft centerline height
b	100 mm	Width base
c	35 mm	Height base
m	290 mm	Distance fixing bore
u	22 mm	Width slot
v	28 mm	Length slot
s	19,05 mm	Screw size
s	M20	Size of fixing screws
D 2	131 mm	Diameter sealing groove
D 3	141 mm	Diameter sealing groove
g 1	6 mm	Width sealing groove
g 2	125 mm	Distance sealing
m 1	250 mm	Distance holes aligned pins m1
u 1	8 mm	Bore diameter u1
u 2	18 mm	Bore diameter u2

Dimensions

n 3	86 mm	Distance lubrication
n 4	128 mm	Distance lubriaction sealing
g 4	38 mm	horizontal distance of grease outlet
g 3	14 mm	Wall thickness