





**SL183004-A-XL-C3**

Cylindrical roller bearing

Cylindrical roller bearing SL18, full complement roller set, two-row, semi-locating bearing, 1 rib on outer ring, 3 ribs on inner ring, type SL18

X-life

Informacje techniczne

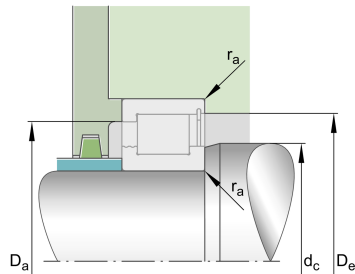

Twoja aktualna wersja produktu

|                           |              |                                   |
|---------------------------|--------------|-----------------------------------|
| Design                    | A            | Internal Variant A                |
| Radial internal clearance | C3 (Group 3) | Internal clearance larger than CN |
| Tolerance class           | PN           | Normal (ISO 492:2023)             |
| Number of rows            | 1            | Single-row design                 |

Main Dimensions & Performance Data

|                 |              |                                   |
|-----------------|--------------|-----------------------------------|
| d               | 20 mm        | Bore diameter                     |
| D               | 42 mm        | Outside diameter                  |
| B               | 16 mm        | Width                             |
| C <sub>r</sub>  | 30.500 N     | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 26.000 N     | Basic static load rating, radial  |
| C <sub>ur</sub> | 4.550 N      | Fatigue load limit, radial        |
| n <sub>G</sub>  | 13.100 1/min | Limiting speed                    |
| n <sub>gr</sub> | 7.500 1/min  | Reference speed                   |
| ≈m              | 104,7 g      | Masa                              |



### Mounting dimensions

|              |         |                                      |
|--------------|---------|--------------------------------------|
| $d_{a \min}$ | 28,8 mm | Minimum diameter shaft shoulder      |
| $d_{c \min}$ | 28,5 mm | Minimum shaft shoulder               |
| $D_{a \max}$ | 32,5 mm | Maximum diameter of housing shoulder |
| $D_{e \min}$ | 36,5 mm | Minimum diameter of housing shoulder |
| $r_{a \max}$ | 0,6 mm  | Maximum recess radius                |
| E            | 36,8 mm | Raceway diameter outer ring          |

### Dimensions

|            |         |                                 |
|------------|---------|---------------------------------|
| $r_{\min}$ | 0,6 mm  | Minimum chamfer dimension       |
| s          | 1,5 mm  | Axial displacement              |
| $d_1$      | 28,8 mm | Maximum rib diameter inner ring |
| $D_1 \min$ | 32,8 mm | Minimum rib diameter outer ring |

### Temperature range

|            |        |                            |
|------------|--------|----------------------------|
| $T_{\min}$ | -30 °C | Operating temperature min. |
| $T_{\max}$ | 120 °C | Operating temperature max. |

### Właściwości

|                                                                                     |                                   |
|-------------------------------------------------------------------------------------|-----------------------------------|
|  | Obciążenie promieniowe            |
|  | Obciążenie osiowe jednokierunkowe |
|  | Smarowanie smarem                 |
|  | Smarowanie olejem                 |
|  | Bez uszczelnienia                 |