
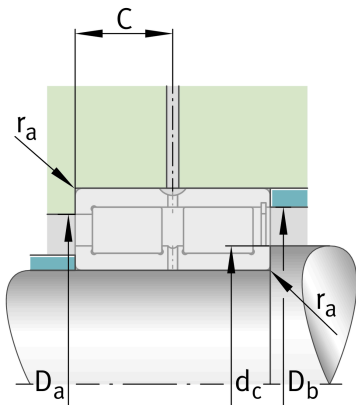


SL185030-A-BR

Cylindrical roller bearing

Cylindrical roller bearing SL1850...-A, full complement roller set, two-row, semi-locating bearing, 1 rib on outer ring, 3 ribs on inner ring, type SL18

Informacje techniczne



Twoja aktualna wersja produktu

Design	A	Internal Variant A
Radial internal clearance	CN (Group N)	Normal internal clearance
Tolerance class	PN	Normal (ISO 492:2023)
Number of rows	2	Double-row design

Main Dimensions & Performance Data

d	150 mm	Bore diameter
D	225 mm	Outside diameter
B	100 mm	Width
C _r	810.000 N	Basic dynamic load rating, radial
C _{0r}	1.390.000 N	Basic static load rating, radial
C _{ur}	186.000 N	Fatigue load limit, radial
n _G	1.740 1/min	Limiting speed
n _{gr}	1.150 1/min	Reference speed
≈m	12,828 kg	Masa



Mounting dimensions

$d_{c\ min}$	170 mm	Minimum shaft shoulder
$d_{a\ min}$	170 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	198 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	2 mm	Maximum recess radius
$r_{a1\ max}$	2 mm	Maximum recess radius
$D_{e\ min}$	198 mm	Minimum diameter of housing shoulder

Dimensions

r_{min}	2 mm	Minimum chamfer dimension
$r_{1\ min}$	2 mm	Minimum chamfer dimension
s	6 mm	Axial displacement
C	50 mm	Distance to lubrication hole
d_1	170 mm	Maximum rib diameter inner ring
$D_1\ min$	198 mm	Minimum rib diameter outer ring
E	207,5 mm	Raceway diameter outer ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Smarowanie smarem
	Smarowanie olejem
	Bez uszczelnienia