



25.08.2026, 05:29:19 UTC

SCHAEFFLER




SX011832-A

Crossed roller bearing

Crossed roller bearingsdimension series 18 to
DIN 616

Informacje techniczne

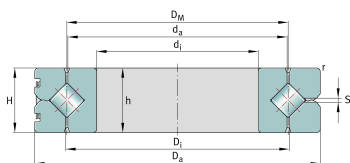

Main Dimensions & Performance Data

d ₁	160 mm	Bore Diameter
	0,004 mm	Bore diameter upper tolerance
	-0,021 mm	Bore diameter lower tolerance
D _a	200 mm	Outside Diameter
	0 mm	Outside diameter upper tolerance
	-0,029 mm	Outside diameter lower tolerance
H	20 mm	Height of the assembled bearing
h _i	20 mm	Height inner ring
	0,1 mm	Width upper tolerance
	-0,1 mm	Width lower tolerance
≈m	1,581 kg	Masa

Dimensions

D _i	180,8 mm	Inner diameter outer ring
D _M	180 mm	Rolling element pitch circle diameter
d _a	179,2 mm	Outer diameter inner ring
h	20 mm	Height of individual ring
	0 mm	Height of individual ring upper tolerance
	-0,025 mm	Height of individual ring lower tolerance
r _{min}	1,1 mm	Chamfer dimension
S	1,5 mm	Diameter of lubrication hole

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje



Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	80 °C	Operating temperature max.

Calculation factors

	0,015 mm	Running accuracy, radial
	0,01 mm	Running accuracy, axial
$S_{r min}$	0,005 mm	Minimum radial bearing clearance, at standard bearing clearance
$S_{r max}$	0,02 mm	Maximum radial bearing clearance, at standard bearing clearance
$S_{k min}$	0,01 mm	Minimum axial tilting clearance, at standard bearing clearance
$S_{k max}$	0,04 mm	Maximum axial tilting clearance, at standard bearing clearance
C_a	69.000 N	Basic dynamic load rating, axial
C_{0a}	255.000 N	Basic static load rating, axial
C_r	49.000 N	Basic dynamic load rating, radial (for radial load only)
C_{0r}	126.000 N	Basic static load rating, radial (for radial load only)
$N_{G oil}$	850 1/min	Limiting speed for oil lubrication with normal clearance
N_G Grease	425 1/min	Limiting speed for grease lubrication with normal clearance
	61832	Dimensions identical to ISO dimension series 18

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie smarem
	Smarowanie olejem
	Bez uszczelnienia
	Mala przestrzeń zabudowy