




TASE70-XL

Plummer block housing unit

Plummer block housing units TASE, cast iron housing, radial insert ball bearing with eccentric locking collar, T seals

X-life

Informacje techniczne

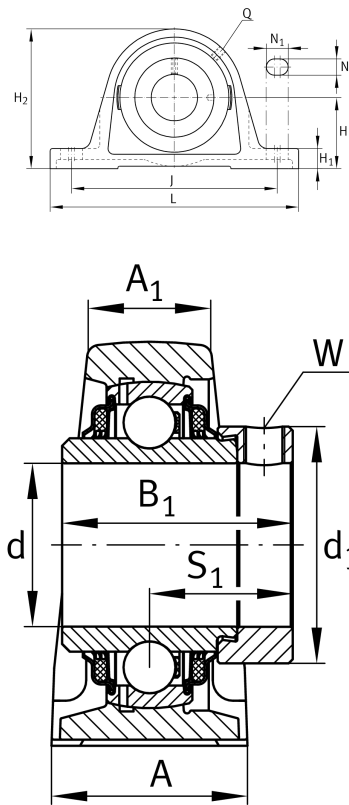

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|                |         |               |
|----------------|---------|---------------|
| d              | 70 mm   | Bore diameter |
| L              | 260 mm  | Length total  |
| H <sub>2</sub> | 156 mm  | Height        |
| ≈m             | 6,09 kg | Masa          |

Mounting dimensions

|                |          |                      |
|----------------|----------|----------------------|
| J              | 202,5 mm | Distance fixing bore |
| N              | 22 mm    | Width (slot)         |
| N <sub>1</sub> | 28 mm    | Length (slot)        |

Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 79,4 mm | Distance shaft axis                   |
| A              | 65 mm   | Width (base)                          |
| A <sub>1</sub> | 44 mm   | Width (head)                          |
| H <sub>1</sub> | 27,5 mm | Height (base)                         |
| B <sub>1</sub> | 66 mm   | Locking collar total width            |
| S <sub>1</sub> | 44,5 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |



Additional information

|               |                     |
|---------------|---------------------|
| ASE14         | Housing             |
| GE70-XL-KTT-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |