




TCJ75-XL

Flanged housing unit

Housing units TCJ, four-bolt flanged housing units, cast iron, eccentric locking collar, T seals

X-life

Informacje techniczne

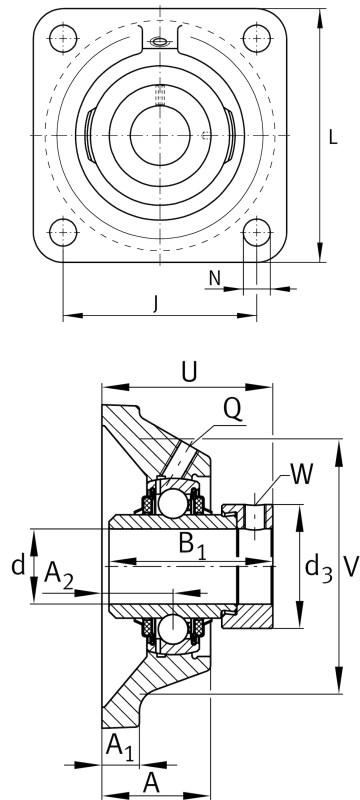

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	75 mm	Bore diameter
L	197 mm	Flange width
U	86,9 mm	Total height unit
C _r	62.000 N	Basic dynamic load rating, radial
C _{0r}	44.500 N	Basic static load rating, radial
C _{ur}	2.300 N	Fatigue load limit, radial
≈m	5,83 kg	Masa

Mounting dimensions

J	153 mm	Distance fixing bore
N	23 mm	Fixing bore
W	6 mm	Width across flats
n	4	Number of screwing holes



Dimensions

A	55,8 mm	Height housing
A ₁	20 mm	Thickness of flange
A ₂	41,3 mm	Distance raceway
B ₁	67 mm	Locking collar total width
V	170 mm	Shoulder diameter housing
Q	M6	Connection thread for lubrication
d ₃	100 mm	Outside diameter locking device

Additional information

1	Number of housings
CJ15	Housing
GE75-XL-KTT-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.