




TFE40-XL

Flanged housing unit

Housing units TFE, four-bolt flanged housing units, cast iron, centring spigot, eccentric locking collar, T seals

X-life

Informacje techniczne

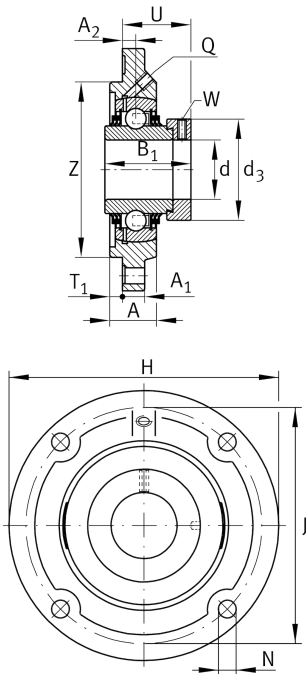

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	40 mm	Bore diameter
H	145 mm	Height flange
H	145 mm	Flange width
U	46,6 mm	Total height unit
C _r	34.500 N	Basic dynamic load rating, radial
C _{0r}	19.800 N	Basic static load rating, radial
C _{ur}	840 N	Fatigue load limit, radial
≈m	1,71 kg	Masa

Mounting dimensions

J	120 mm	Pitch circle diameter (holes)
N	11,5 mm	Fixing bore
T ₁	4 mm	Height spigot
Z	100 mm	Diameter spigot
	h8	Diameter spigot clearance
W	5 mm	Width across flats
n	4	Number of screwing holes



Dimensions

A	28 mm	Height housing
A ₁	11,5 mm	Thickness of flange
A ₂	11,5 mm	Distance raceway
B ₁	56,5 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d ₃	58 mm	Outer diameter locking collar

Additional information

GEHFE08-GG-N	Housing
GE40-XL-KTT-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.