


TKVD15X3000-W-U-0001-EWL-G4

Profile rail

Guideways for four-row linear recirculating ball bearing and guideway assembly KUBE...
W, wide guideway, suitable for screw mounting from below

Informacje techniczne

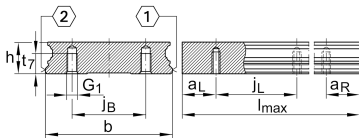

Twoja aktualna wersja produktu

Size code	15
Length	~3000
Accuracy class	G4
Guideway design	przypadku jakichkolwiek pytań prosimy o bezpośredni kontakt z partnerem handlowym.
	Wide execution

Main Dimensions & Performance Data

I	3.000 mm	~guideway length
h	12,9 mm	Height
b	37 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	10,47 kg	Masa

Mounting dimensions

G 1	M5	Thread
G1 M A	10 Nm	Tightening torque



Dimensions

l_{max}	2.950 mm	Max length single piece guideway
$a_{L\ max}$	44 mm	Distance
$a_{L\ min}$	10 mm	Distance
$a_{R\ max}$	44 mm	Distance
$a_{R\ min}$	10 mm	Distance
j_L	50 mm	Increment
j_B	22 mm	Increment
a_5	7,5 mm	Distance
t_7	7 mm	Thread length

Additional information

KWVE15-W...	Usable carriage(s)
KUVE15-W...	Usable linear systems