
**TKVD15X4000-B-0001-EWL-G3** [🔗](#)

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Informacje techniczne

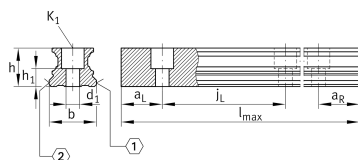

Twoja aktualna wersja produktu

Size code	15
Length	~4000
Version	B
Accuracy class	G3

Main Dimensions & Performance Data

l	4.000 mm	~guideway length
h	15 mm	Height
b	15 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	5,611 kg	Masa

Mounting dimensions

K ₁	M4	Thread
K1 M _A	5 Nm	Tightening torque
d ₁	4,6 mm	Bore diameter



Dimensions

l_{max}	3.900 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
h_1	7,7 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance