


TKVD20X3000-W-U-0001-EWL-G2

Profile rail

Guideways for four-row linear recirculating ball bearing and guideway assembly KUBE...-W, wide guideway, suitable for screw mounting from below

Informacje techniczne

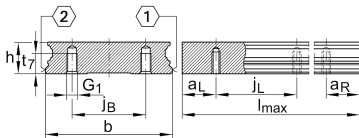

Twoja aktualna wersja produktu

Size code	20
Accuracy class	G2
Guideway design	przypadku jakichkolwiek pytań prosimy o bezpośredni kontakt z partnerem handlowym. Wide execution

Main Dimensions & Performance Data

I	3.000 mm	~guideway length
h	17 mm	Height
b	42 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	15,14 kg	Masa

Mounting dimensions

G 1	M6	Thread
G1 M A	17 Nm	Tightening torque



Dimensions

l_{max}	2.940 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
j_B	24 mm	Increment
a_5	9 mm	Distance
t_7	10 mm	Thread length

Additional information

KWVE20-W...	Usable carriage(s)
KUVE20-W...	Usable linear systems