


TKVD20X3000-W-U-0001-EWL-G3

Profile rail

Guideways for four-row linear recirculating ball bearing and guideway assembly KUV...
W, wide guideway, suitable for screw mounting from below

Informacje techniczne

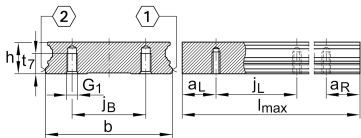

Twoja aktualna wersja produktu

Size code 20

Accuracy class G3

Guideway design przypadku jakichkolwiek pytań prosimy o bezpośredni kontakt z partnerem handlowym. Wide execution

Main Dimensions & Performance Data

l 3.000 mm ~guideway length

h 17 mm Height

b 42 mm Width

Tol b -0,005 mm Upper tolerance

Tol b -0,035 mm Lower tolerance

≈m 15,14 kg Masa

Mounting dimensions

G 1 M6 Thread

G1 M A 17 Nm Tightening torque



Dimensions

l_{max}	2.940 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
j_B	24 mm	Increment
a_5	9 mm	Distance
t_7	10 mm	Thread length

Additional information

KWVE20-W...	Usable carriage(s)
KUVE20-W...	Usable linear systems