
**TKVD55X6000-B-0001-EWL-G4** [🔗](#)

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Informacje techniczne

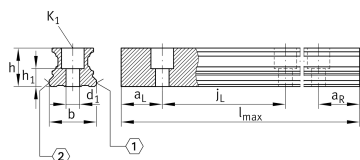

Twoja aktualna wersja produktu

Size code	55
Length	~6000
Version	B
Accuracy class	G4

Main Dimensions & Performance Data

l	6.000 mm	~guideway length
h	41,5 mm	Height
b	53 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	81,85 kg	Masa

Mounting dimensions

K 1	M14	Thread
K1 M A	220 Nm	Tightening torque
d 1	15,4 mm	Bore diameter



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L\ max}$	107 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	107 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	120 mm	Increment
h_1	19 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance