




TLS-15T

Hydraulic wedge spreader

BETEX TLS, for lifting loads and spreading  
2 components

Informacje techniczne

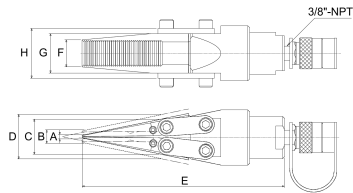

Twoja aktualna wersja produktu

|         |    |                |
|---------|----|----------------|
| Version | SP | Single product |
|---------|----|----------------|

Technical data

|    |         |                       |
|----|---------|-----------------------|
|    | 15      | Capacity class (tons) |
|    | 25 mm   | Stroke cylinder       |
|    | 700 bar | Operating pressure    |
| A  | 5 mm    | Spread, min.          |
| B  | 15 mm   | Spread, max.          |
| C  | 36 mm   |                       |
| D  | 46 mm   |                       |
| E  | 232 mm  |                       |
| F  | 31 mm   |                       |
| G  | 45 mm   |                       |
| H  | 57 mm   |                       |
| ≈m | 3 kg    | Masa                  |

Additional information

|                                                                                                                              |                   |
|------------------------------------------------------------------------------------------------------------------------------|-------------------|
| Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person | Product specifics |
| for industrial maintenance and repair jobs                                                                                   | Usability         |
| 1 piece wedge spreader                                                                                                       | Delivery scope    |