
**TSX35X6000-E-U-0001-EWL-G1** [🔗](#)

Profile rail

Guideways for linear recirculating roller bearing, for screw mounting from below, TSX...-E-U

Informacje techniczne

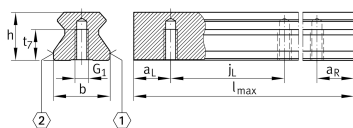

Twoja aktualna wersja produktu

Size code	35	
Length	~6000	
Version	E	
Locationing guideway	U	Hole pattern from below
Accuracy class	G1	

Main Dimensions & Performance Data

l	6.000 mm	Guideway length
h	30 mm	Height
b	34 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	37,87 kg	Masa

Mounting dimensions

G 1	M8	Fixing screws (DIN ISO 4762-12.9)
G1 M A	41 Nm	Tightening torque



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	31 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	31 mm	Distance
j_L	40 mm	Increment
t_7	15 mm	Thread length

Additional information

RWU35-E-...; RWU35-F-...	Usable carriage(s)
RUE35-E-...; RUE35-F-...	Usable linear systems