


**TSX35X6000-E-U-0001-EWL-G2**

Profile rail

Guideways for linear recirculating roller bearing, for screw mounting from below, TSX...E-U

Informacje techniczne

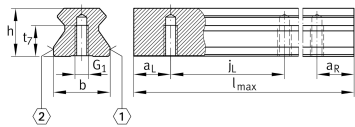

Twoja aktualna wersja produktu

|                    |       |                         |
|--------------------|-------|-------------------------|
| Size code          | 35    |                         |
| Length             | ~6000 |                         |
| Version            | E     |                         |
| Locationg guideway | U     | Hole pattern from below |
| Accuracy class     | G2    |                         |

Main Dimensions & Performance Data

|       |           |                 |
|-------|-----------|-----------------|
| I     | 6.000 mm  | Guideway length |
| h     | 30 mm     | Height          |
| b     | 34 mm     | Width           |
| Tol b | -0,005 mm | Upper tolerance |
| Tol b | -0,035 mm | Lower tolerance |
| ≈m    | 37,87 kg  | Masa            |

Mounting dimensions

|        |       |                                   |
|--------|-------|-----------------------------------|
| G 1    | M8    | Fixing screws (DIN ISO 4762-12.9) |
| G1 M A | 41 Nm | Tightening torque                 |



Dimensions

|             |          |                                  |
|-------------|----------|----------------------------------|
| $l_{max}$   | 6.000 mm | Max length single piece guideway |
| $a_{L min}$ | 20 mm    | Distance                         |
| $a_{L max}$ | 31 mm    | Distance                         |
| $a_{R min}$ | 20 mm    | Distance                         |
| $a_{R max}$ | 31 mm    | Distance                         |
| $j_L$       | 40 mm    | Increment                        |
| $t_7$       | 15 mm    | Thread length                    |

Additional information

|                             |                       |
|-----------------------------|-----------------------|
| RWU35-E-...;<br>RWU35-F-... | Usable carriage(s)    |
| RUE35-E-...; RUE35-F-...    | Usable linear systems |