
**TSX55X6000-E-U-0001-EWL-G3** [🔗](#)

Profile rail

Guideways for linear recirculating roller bearing, for screw mounting from below, TSX...-E-U

Informacje techniczne

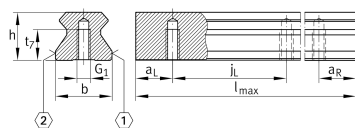

Twoja aktualna wersja produktu

Size code	55	
Length	~6000	
Version	E	
Locationing guideway	U	Hole pattern from below
Accuracy class	G3	

Main Dimensions & Performance Data

l	6.000 mm	Guideway length
h	45 mm	Height
b	53 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	86,5 kg	Masa

Mounting dimensions

G 1	M14	Fixing screws (DIN ISO 4762-12.9)
G1 M A	220 Nm	Tightening torque



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	47 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	47 mm	Distance
j_L	60 mm	Increment
t_7	22 mm	Thread length

Additional information

RWU55-E-...; RWU55-F-...	Usable carriage(s)
RUE55-E-...; RUE55-F-...	Usable linear systems