


FAG

UCFA206-19

Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

Informacje techniczne

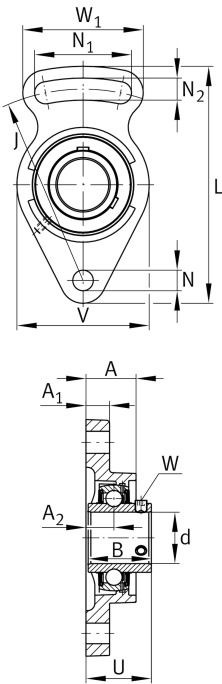

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|    |          |                   |
|----|----------|-------------------|
| d  | 30,16 mm | Bore diameter     |
| L  | 144 mm   | Length total      |
| U  | 40,2 mm  | Total height unit |
| ≈m | 0,9 kg   | Masa              |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| N   | 12 mm  | Fixing bore          |
| N 1 | 58 mm  | Length (slot)        |
| N 2 | 12 mm  | Width (slot)         |
| J   | 117 mm | Distance fixing bore |

Dimensions

|     |       |                                   |
|-----|-------|-----------------------------------|
| A 1 | 14 mm | Thickness of flange               |
| A 2 | 18 mm | Distance raceway                  |
| A   | 31 mm | Height housing                    |
| V   | 80 mm | Shoulder diameter housing         |
| W   | 72 mm | Width housing slot side           |
| Q   | M6    | Connection thread for lubrication |



Additional information

|          |                     |
|----------|---------------------|
| FA206    | Housing             |
| UC206-19 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |